

# COPPER BUSBARS


## BUSBARS FOR MCBS – ELEMENTS, 1 PHASE, PIN TYPE

Artical	Lenght mm	Pole	Section (mm <sup>2</sup> )	I (A)
<b>110</b>	1000	56 x 1	10	63
<b>110 S</b>	210	12 x 1	10	63
<b>111</b>	1000	56 x 1	16	80
<b>111 S</b>	210	12 x 1	16	80




## BUSBARS FOR MCBS – ELEMENTS, 1 PHASE, PIN TYPE, INSULATED

Artical	Lenght mm	Pole	Section (mm <sup>2</sup> )	I (A)
<b>130</b>	1000	56 x 1	10	63
<b>130 S</b>	210	12 x 1	10	63
<b>131</b>	1000	56 x 1	16	80
<b>131 S</b>	210	12 x 1	16	80

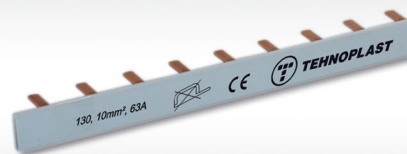


## BUSBARS, 3- PHASES, PIN TYPE, FOR MCBS ELEMENTS, L- STYLE

Artical	Lenght mm	Pole	Section (mm <sup>2</sup> )	I (A)
<b>140</b>	1000	19 x 3	10	63
<b>140 S</b>	210	4 x 3	10	63
<b>141</b>	1000	19 x 3	16	80
<b>141 S</b>	210	4 x 3	16	80

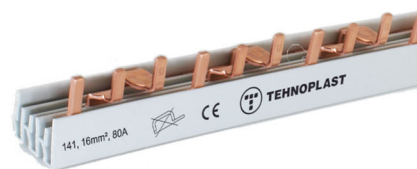

## BUSBARS, 3- PHASES, FORK TYPE, FOR MCBS ELEMENTS, L- STYLE

Artical	Lenght mm	Pole	Section (mm <sup>2</sup> )	I (A)
<b>150</b>	1000	19 x 3	10	63
<b>150 S</b>	210	4 x 3	10	63
<b>151</b>	1000	19 x 3	16	80
<b>151 S</b>	210	4 x 3	16	80

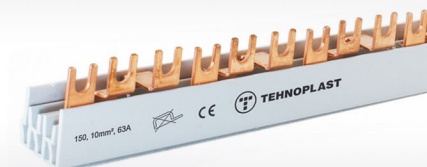

## BUSBARS FOR MCBS – ELEMENTS, 1 PHASE, FORK TYPE, INSULATED

Artical	Lenght mm	Pole	Section (mm <sup>2</sup> )	I (A)
<b>160</b>	1000	56 x 1	10	63
<b>160 S</b>	210	12 x 1	10	63
<b>161</b>	1000	56 x 1	16	80
<b>161 S</b>	210	12 x 1	16	80

